


RECIPROCATING FEEDERS “AC” SERIES



FOR THE DOSAGE OF MATERIALS EVEN WET AND EARTHY

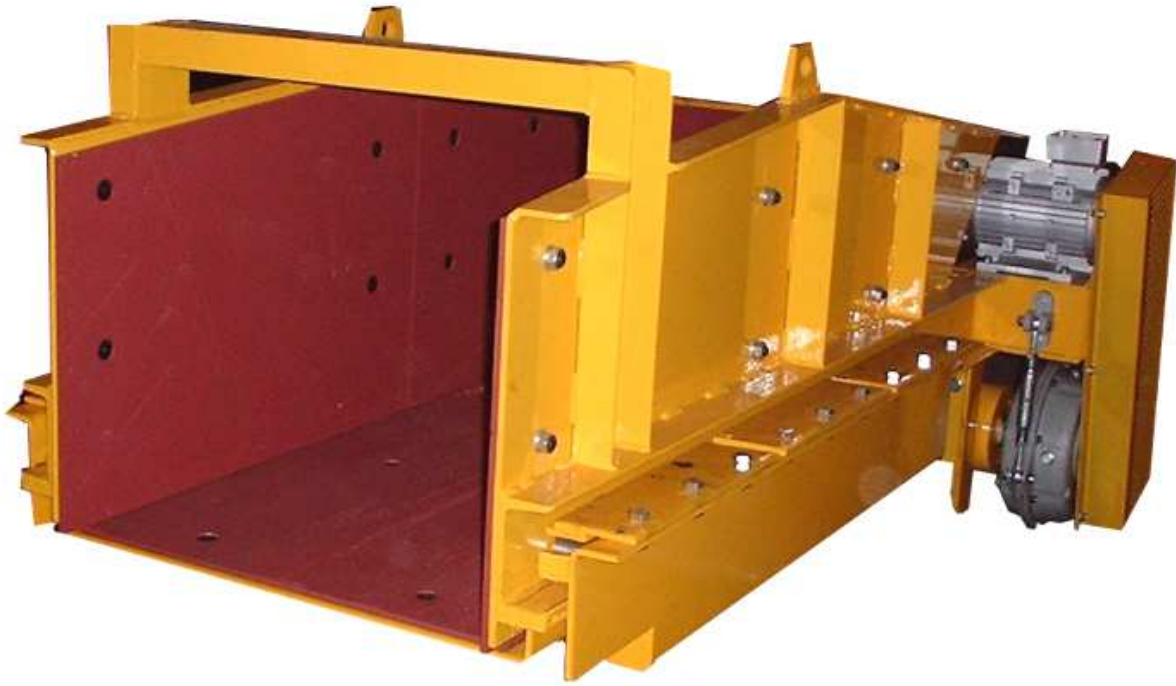

- regular feeding even with materials smooth, moist and earthy
- flow rate regulation by varying the cart ride amplitude and the movement frequency
- easily replaceable anti-wear steel linings

TYPE*	Useful width of the upper passage (mm)	Max. capacity (mc/h)	Power of the electric motor (Kw)**
AC 45	450	30	1.1
AC 60	600	70	3

* The models shown are standards that can be adapted and modified according to specific customer needs.

** with servoventilation and inverter speed regulation.